




Hi-TECH 700

Extra-Large Horizontal Turning Center





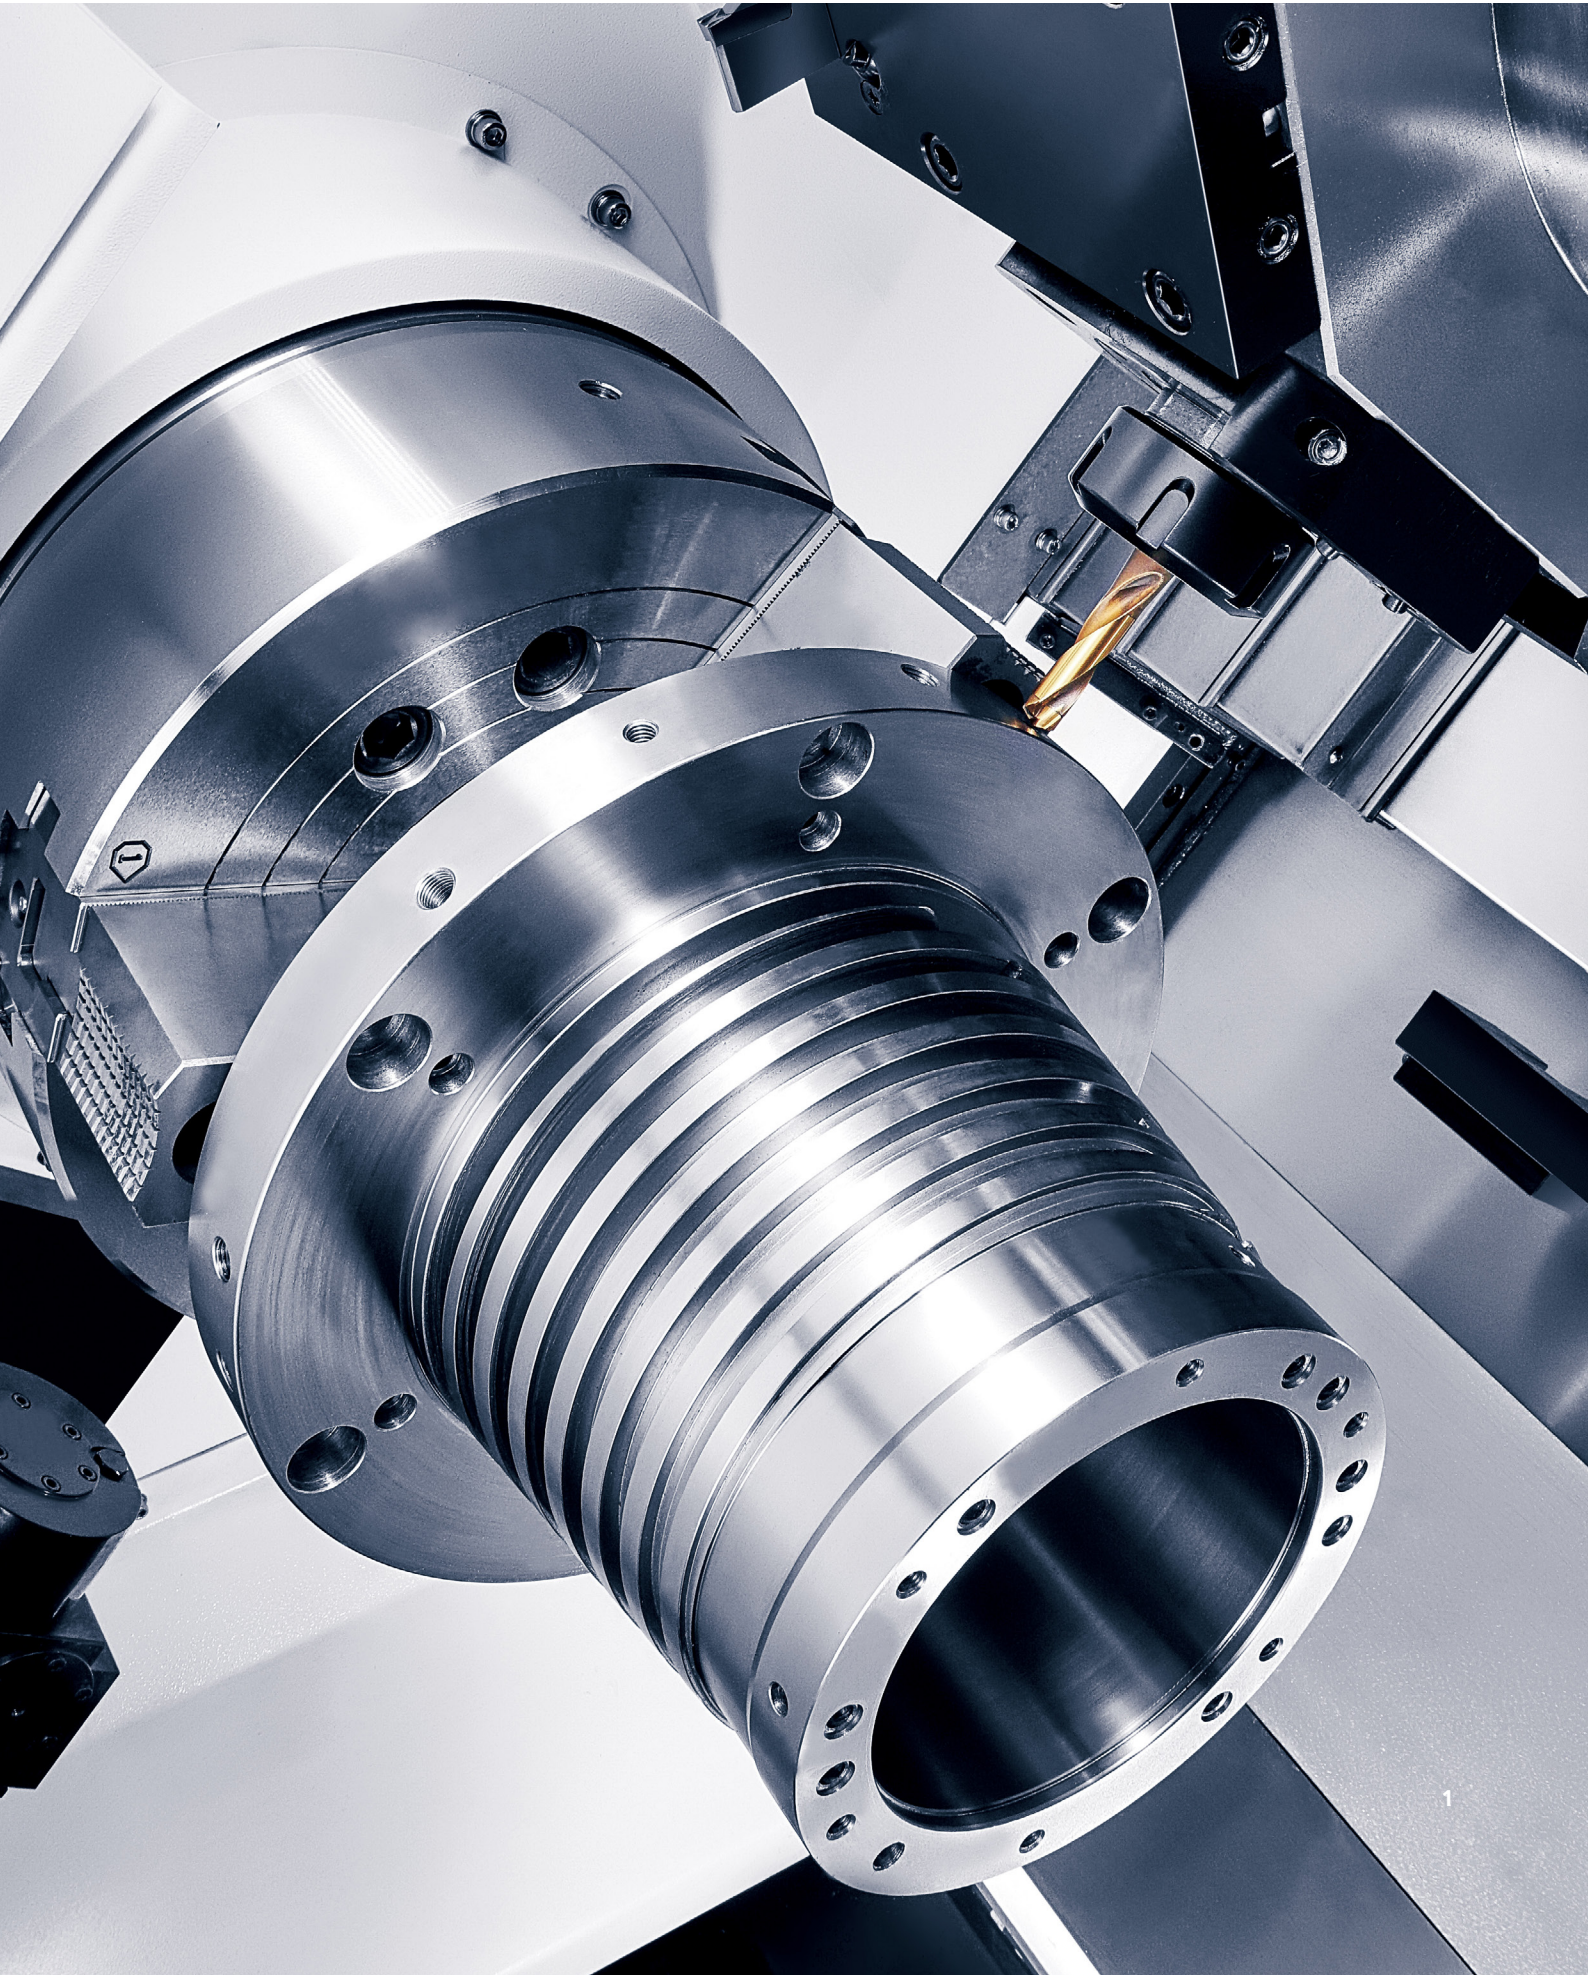


HEAVY-DUTY HORIZONTAL TURNING CENTER

Best structure for Heavy Duty Turning

Hi-TECH 700 is capable of handling heavy duty turning and milling in a single process. Its extra-rigid Turret, the stability provided by the one piece casting bed and box way design are ideal for turning of large sized workpieces.

- 1 Spindle Housing / Sample / SM45C 2 Box way slide
3 Motor Housing/Machine Tool Industry/SM45C 4 Customization Design

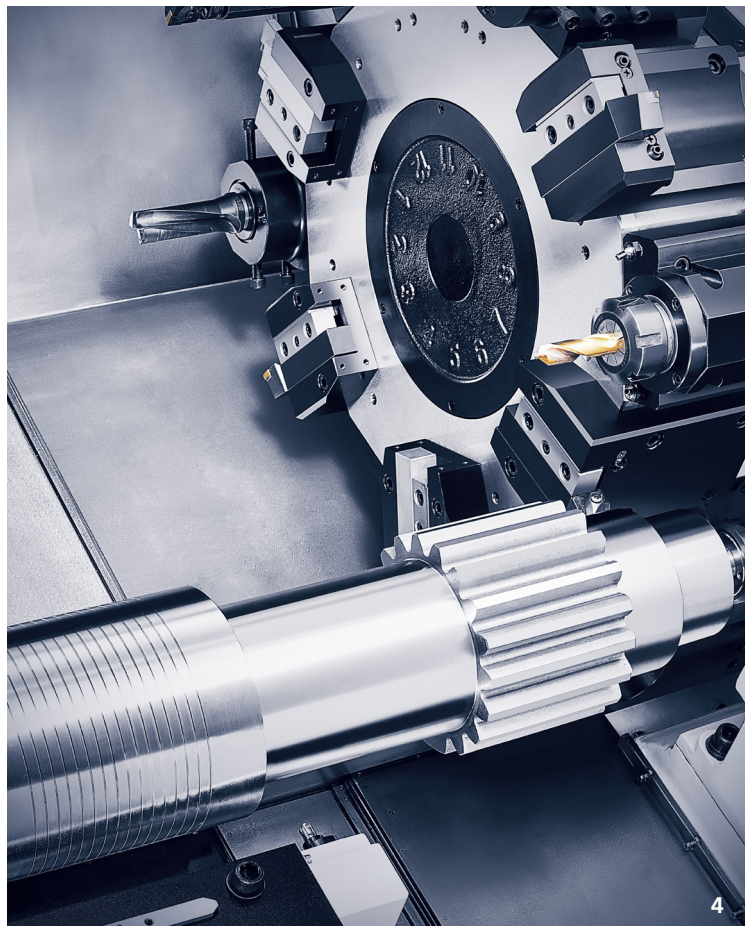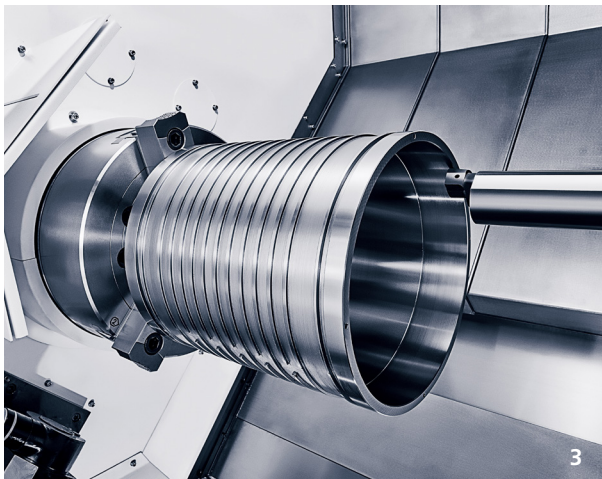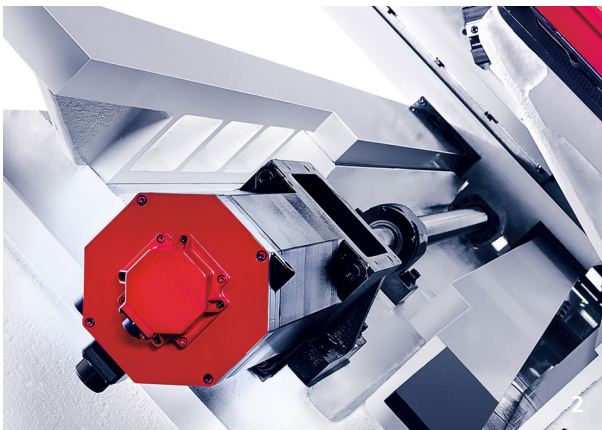

HIGH PERFORMANCE EXTRA-LARGE TURNING CENTER

Hi-TECH 700 has a integrated 45-degree slant bed frame to minimize heat distortion, all guide way are designed as solid Box guide ways to maintain rigidity and precision even during prolonged operations. Its automatic transmission system allows low-speed, high-torque turning as well as high-speed machining, Hwacheon's advanced, patented design prevents deterioration of the workpiece from thermal displacement






Hand-Scraped to Perfection

The guide-ways are hand-scraped and polished to the highest precision based on Hwacheon's 70 years craftsmanship experience, this to reduce vibration and allows precision feed during heavy operations.




Box Way Design

Hi-TECH 700's box way guide design improves rigidity and precision after many hours of continued operation.

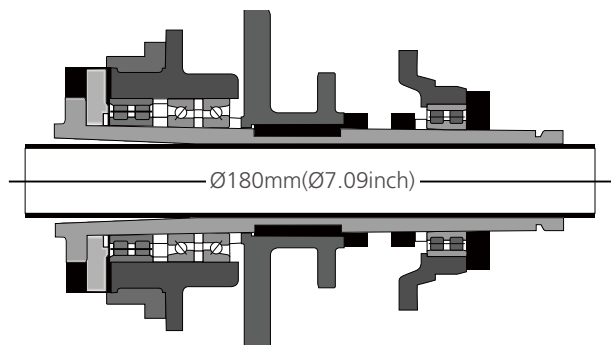

- Ultra-precision Ø180mm(Ø7.09inch) double row of cylindrical roller bearings in the front and duplex angular thrust bearings ensure excellent stabilities for heavy duty cutting
- By adopting the powerful spindle motor 37kW(Opt. 45kW). Heavy duty cutting and abnormal workpiece can be possible with superior machining

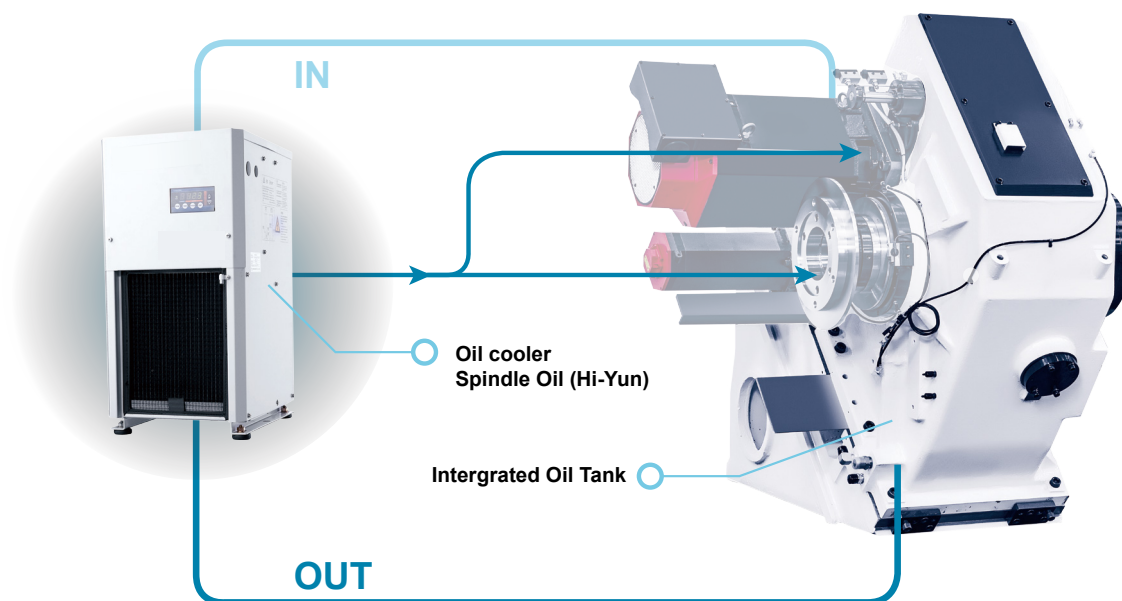


-The thermal deformation of the spindle is minimized. Because generated heat is removed by Jet Lubrication system as well as circulating jacket inside. For this reason, the accuracy of the machining is raised and constantly stabilized.

Chuck Size(inch)	: 15 (Opt. 18 / 21 / 24)
Type of Spindle Nose(ASA)	: A2-11
Max. Spindle speed(rpm)	: 1,800
Spindle Motor power(kW/HP)	: 37/30 (50/40)

High Rigid, Stable Bed Frame


The heavily ribbed torque tube design processed with fine grain meehanite prevents twisting and deformation. This design ensure high rigidity with no deformation during heavy & high-speed cutting.

High rigid slant angle allows for easy loading, changing and inspection of tools. This slant angle maintains high stability and brilliant balance

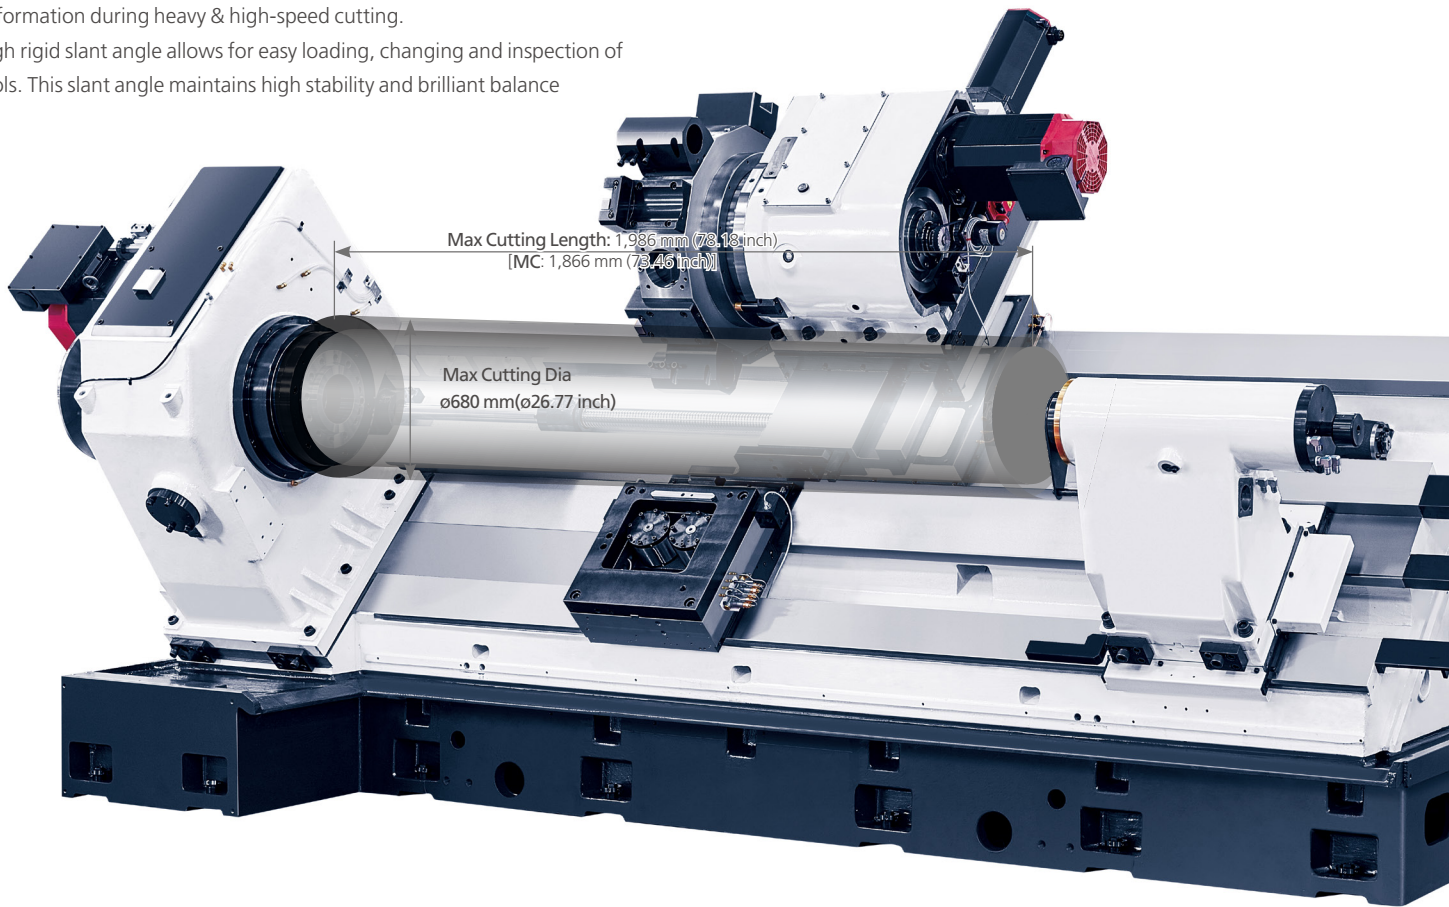

The Programmable Hydraulic Tailstock (Standard)

The tailstock can be programmed to position itself in semi-auto, and it provides firm support for extra-long workpieces to guarantee machining precision. The built-in Tailstock can be operated either by the foot switch or by programming, while providing firm, stable oil-pressure chucking.

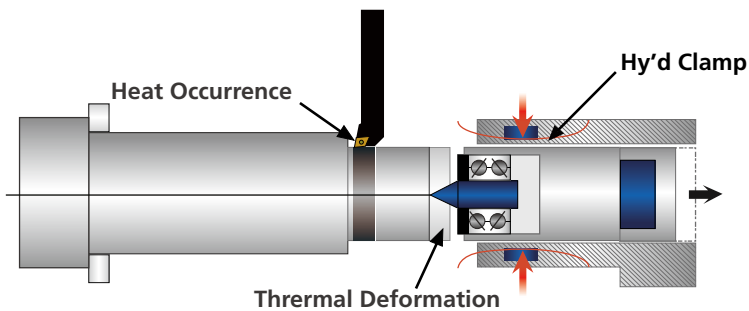

- The quill is activated by foot pedal or program.
- The Tailstock Body is activated by program.
- Absorbed thermal deformation ensures high precision machining




Quill Dia	: Ø150mm (Ø5.9inch)
Quill Stroke	: 150mm (5.9inch)
Tailstock Stroke	: 1,878mm (73.93inch)
Quill Taper	: MT#5




USER FRIENDLY DESIGN, A WIDE RANGE OF OPTIONAL FEATURES

Hi-TECH 700 is designed to be user friendly, so you can concentrate on what you do best: creating quality products—without losing your valuable time to the worries of machine failure and safety. A wide variety of performance upgrade options are available for faster, more precise machining.

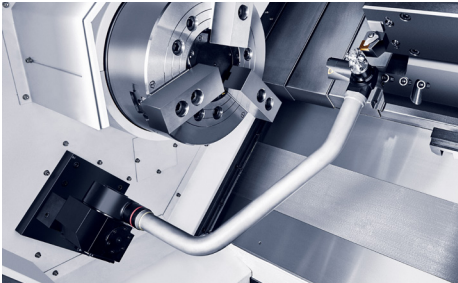

Tool Presetter (Option)

The tool presetter employs a highly accurate sensor to precisely compute for the coordinate settings in less than 15 seconds per tool. Different tool shapes and their tolerance values are entered automatically for the coordinate calculations.

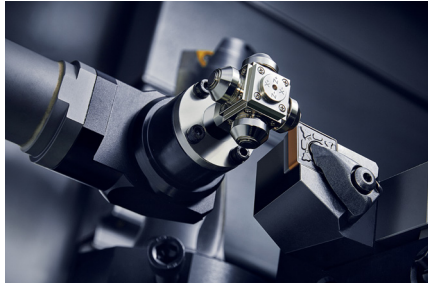

L-HTLD: Hwacheon Lathe Tool Load Detect System (Standard)



The Hwacheon Lathe Tool Load Detect System constantly detects and diagnoses the tool load under a process to prevent tool wear and damage, and to keep your machine and tools in optimal shape.

Load Detection Limit 1

Alarm + Feed Hold



- > When the LIMIT 1 Alarm sounds, the system holds the feed and the machine goes into standby.

Load Detection Limit 2

Alarm + Machine Stop

- > When the LIMIT 2 Alarm sounds, the system stops the machine, and must be reset to operate it.

Wide type Turret Disk(Optional)




* Unit: mm(inch)

Width of Turret Disk	
Std. type Turret Disk	: 135(5.31)
Wide type Turret Disk	: 200(7.87)
MC type Turret Disk	: 166(6.53)
Wide type Turret Disk	: 200(7.87)


Product Data

* Unit: mm(inch)

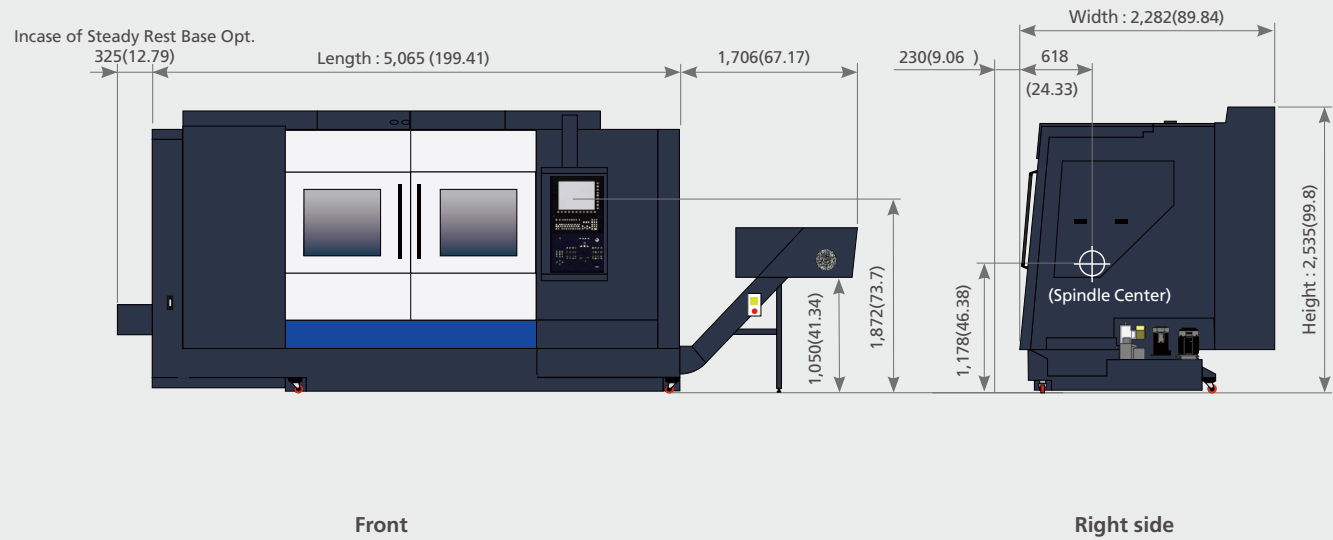


Spindle Power-Torque Diagram

Hi-TECH 700 / Std.

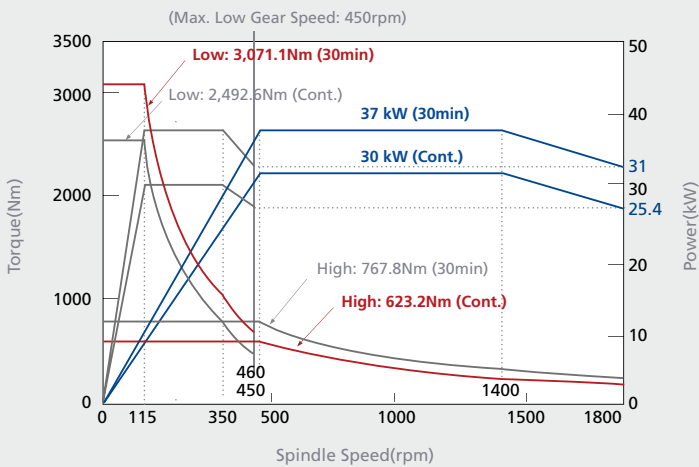


Hi-TECH 700 / MC (Turnmil)

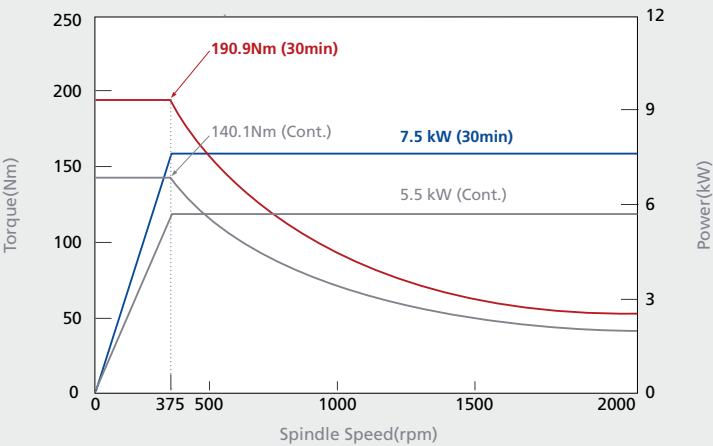


Tool Interference Diagram

※ Unit : mm(inch)

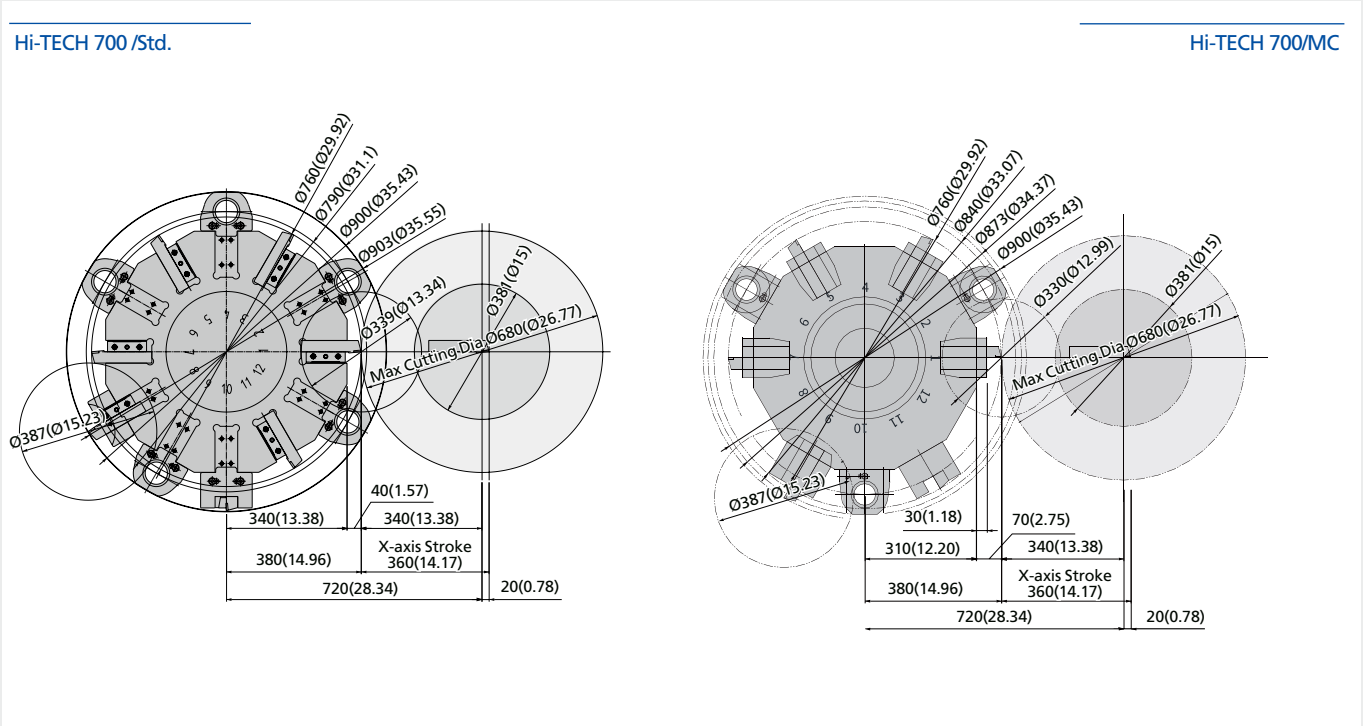

Moving Range
Standard

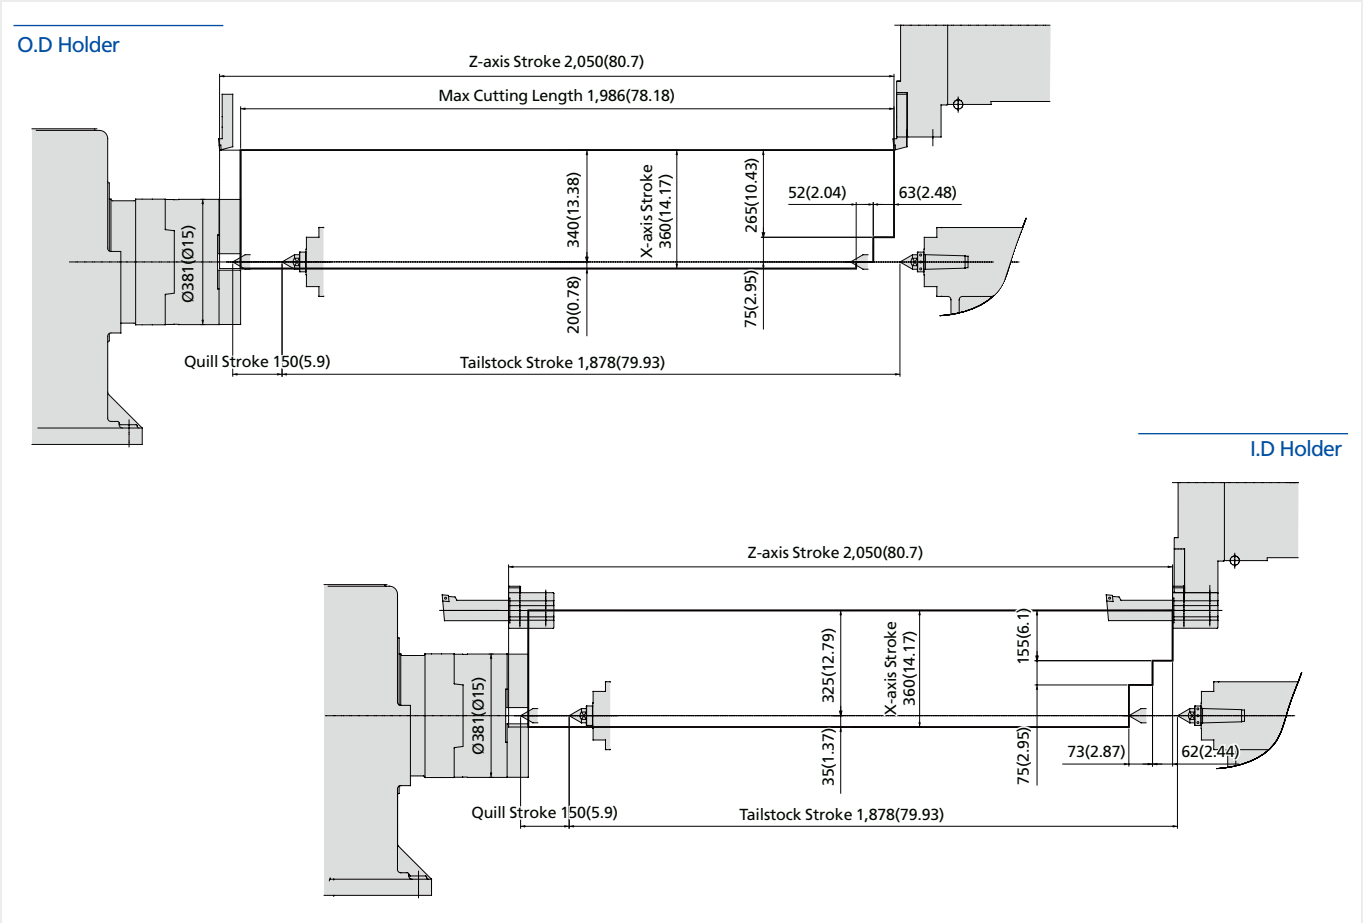


Moving Range


MC

※Unit: mm(inch)


O.D. Holder

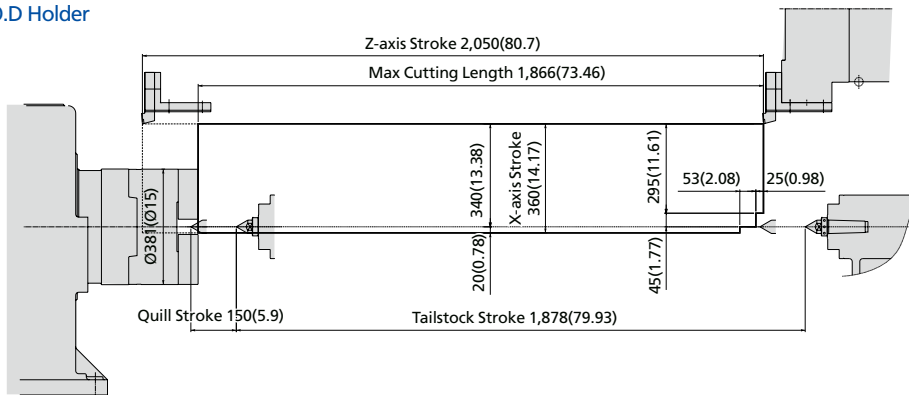


I.D. Holder

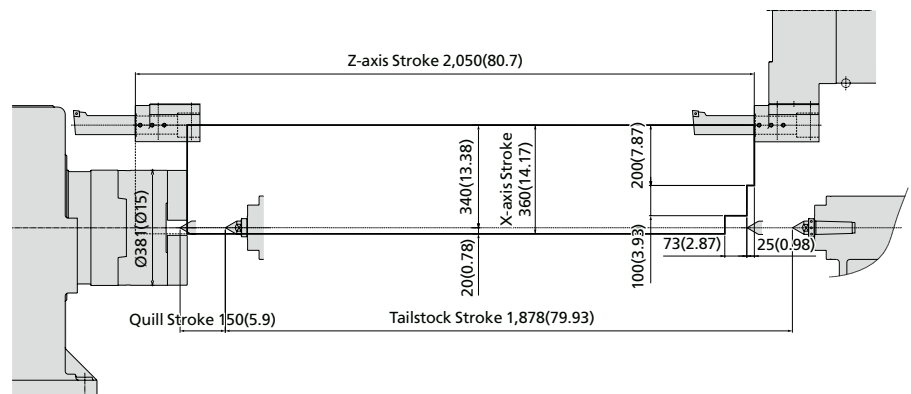

Radial Turnmill Holder

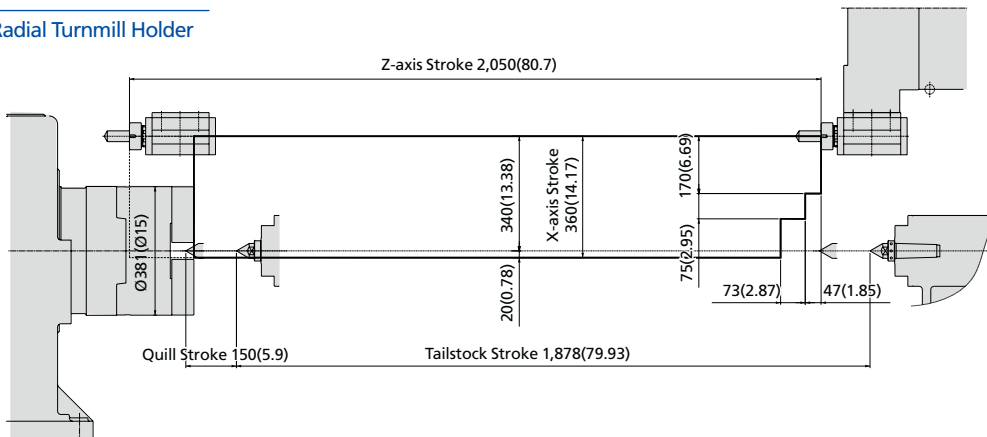


Axial Turnmill Holder

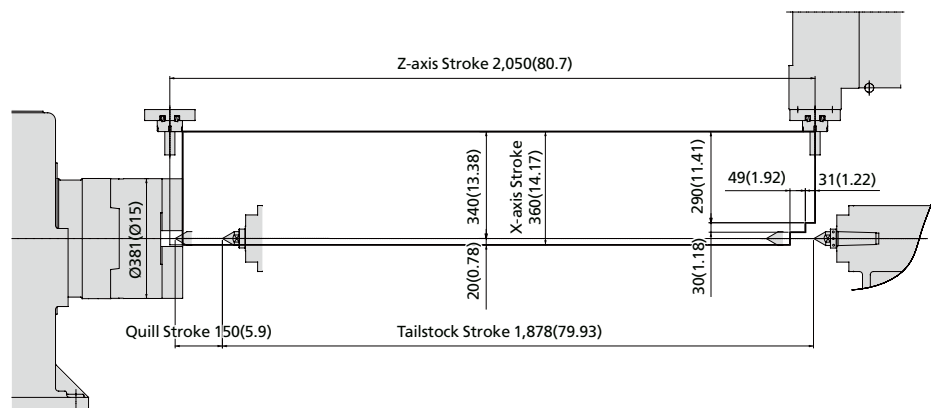

Product Configuration

Each product can be configured to fit your application.

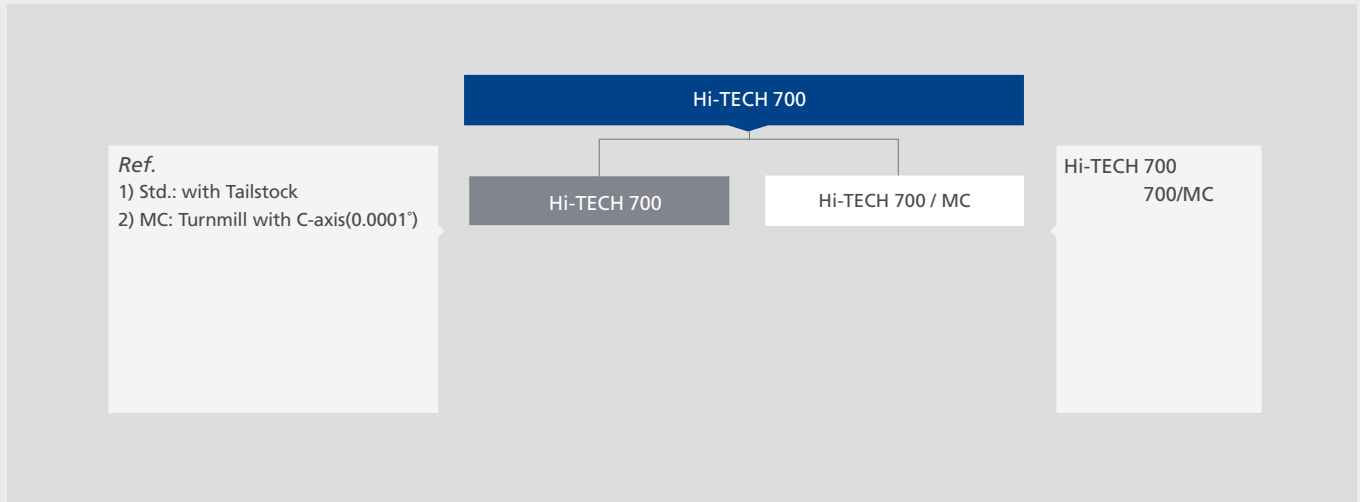

Machine Specifications

ITEM		Hi-TECH 700 SERIES	
		HI-TECH 700	HI-TECH 700/MC
Capacity			
Swing over Bed	mm (inch)	Ø900 (Ø35.43)	
Max Cutting Diameter	mm (inch)	Ø680 (Ø26.77)	
Standard Cutting Diameter	mm (inch)	Ø387 (Ø15.23)	
Max Cutting Length	mm (inch)	1,986 (78.18)	1,866 (73.46)
Chuck Size	inch	15	
Spindle			
Type of Spindle Nose	ASA	A2-11	
Max Spindle Speed	rpm	1,800	
Through Spindle Hole Diameter	mm (inch)	Ø132 (Ø5.2)	
Max Bar Size	mm (inch)	Ø116 (Ø4.56)	
Spindle Bearing Inner Diameter	mm (inch)	Ø180 (Ø7.09)	
Spindle Motor	kW (HP)	37 / 30 (50 / 40)	
Turret			
Number of Tool Station	ea	12	
Tool Size	mm (inch)	□32 × Ø60 (□1.25 x Ø2.5)	
Turret Indexing Time	sec / step	0.4	
Axes			
Rapid Traverse (X / Z)	m/min (ipm)	18 / 18 (709 / 709)	
Max Stroke (X / Z)	mm (inch)	360 / 2,050 (14.17 / 80.70)	
Feed Motor (X / Z)	kW (HP)	6 / 6 (8 / 8)	
Tailstock			
Quill Dia	mm (inch)	Ø150 (Ø5.9)	
Quill Stroke	mm (inch)	150 (5.9)	
Quill Taper	MT	# 5	
Turnmill			
Spindle Motor	kW (HP)	-	7.5 / 5.5 (10 / 7.5)
Max Spindle Speed	rpm	-	2,000
Max Drill / Tap Size	mm (inch)	-	Ø32 (Ø1.26) / M24
Min Index Angle	deg	-	0.0001
Tank Capacity			
Lubrication	ℓ (gal)	12 (3.2)	
Hydraulic	ℓ (gal)	50 (13.2)	
Coolant	ℓ (gal)	300 (79)	
Power Sources			
Electrical Power Supply	kVA	75	
Dimension			
Height	mm (inch)	2,535 (99.8)	
Floor Space (L x W)	mm (inch)	5,065 x 2,282 (199.41 x 89.84)	
Weight	kg(lb _t)	17,350 (38,250)	17,500 (38,581)
NC Controller		Fanuc 0i-TF Plus	

Standard and Optional Product Components

Standard Accessories		Optional Accessories	
• Coolant System	• Manual Guide i	• Air Blower	• NC Cooler
• Door Interlock	• Operation Manual & Parts List	• Air Gun	• Oil Skimmer
• Dual Pressure (C-axis brake)	• Signal Lamp with 3 Colors (R, G, Y)	• Bar Feeder Interface	• Set of Hard Jaw (15" / 18" / 21" / 24")
• Foot Switch	• Spindle Air Curtain	• Chip Conveyor & Box, Side Type	• Spindle Motor Upgrade, 45/37kW (60/50HP)
• Hydraulic Chuck&Cylinder,15"Hollow	• Spindle Cooling System	• Chuck Clamp/Unclamp Confirm Switch	• Tool & Work Counter, External / Internal
• Hydraulic Unit	• Standard Turret, 12 Stations	• Chuck Pressure Check Switch	• Tool Presetter (Automatic)
• HLVC (Hwacheon Lathe Vibration Control)	• Tailstock with Dead Center (MT#5)	• Chuck Pressure Compensation	• Transformer
• L-HTLD (Lathe-Hwacheon Tool Load Detect)	- Tailstock Body Program	• Coolant Gun	• Turnmill Function Including C-axis (0.0001°)
• L-CAL (Lathe Calculator Function)	- Tailstock Quill Program	• Dual Pressure (Chuck)	• Turnmill Holder, Axial / Radial
• L-COUNT (Work / Tool Counter Management)	• Tooling System	• High Pressure Coolant	• Turret for VDI 60
• Leveling Bolt & Plate	• Tool Life Management	- 0.6 / 1.5 / 3 / 7 MPa	• U-Drill Holder
• Lubrication System	• Tool Kit & Box	*For 7 MPa, only water soluble	• Wide Type Turret Disk-BMT75
	• Work Light	coolants are available	• 15" Touch type display (only FANUC)
	• 15" Non touch display (only FANUC)	• Hydraulic Chuck, 18" / 21" / 24"	
		• Hydraulic Steady Rest Base Set	
		• Hydraulic Steady Rest Set	

NC Specifications [Fanuc Oi-TF Plus]

※ : Not available S : Standard O : Option

ITEM	SPECIFICATION	STD	MC
Controlled axis			
Controlled axis (Cs axis)	2-Axes	2-Axes	3-Axes
Simultaneously controlled axes	2-Axes	2-Axes	3-Axes
Least input increment	0.001mm, 0.0001deg, 0.0001inch	S	S
Least input increment 1/10	0.0001mm, 0.00001inch	O	O
inch/metric conversion	G20, G21	S	S
Stored stroke check 1,2,3		S	S
Chamfering on/off		S	S
Backlash compensation		S	S
Operation			
Automatic & MDI operation		S	S
Program number search		S	S
Sequence number search		S	S
Dry run, single block		S	S
Manual handle feed	1Unit	S	S
Manual handle feed rate	x1, x10, x100	S	S
Interpolation function			
Positioning	G00	S	S
Linear interpolation	G01	S	S
Circular interpolation	G02, G03	S	S
Dwell (Per seconds)	G04	S	S
Polar coordinate interpolation	G12.1/G13.1	-	S
Cylindrical interpolation	G7.1	-	S
Threading	G32	S	S
Multiple threading		S	S
Threading retract		S	S
Continuous threading		S	S
Variable lead threading	G34	S	S
Reference position return 1st	G28	S	S
Reference position return check	G27	S	S
2,3,4th reference position return	G30	S	S
Arbitrary speed threading		O	O
Feed function			
Rapid traverse override	F0, F25, F50, F100	S	S
Feed per minute (mm/min)	G98	S	S
Feed per revolution (mm/rev)	G99	S	S
Rapid traverse bell-shaped acceleration/deceleration		S	S
Feedrate override	0-150 %	S	S
Jog feed override	0-1,260 mm/min	S	S
Tool function / compensation			
Tool function	T4-digits	S	S
Tool offset pairs	128pairs	S	S
Tool nose radius compensation		S	S
Tool geometry/wear compensation		S	S
Tool life management		S	S
Automatic tool offset	Tool presetter option is required	S	S
Direct input tool offset value measured B	Tool presetter option is required	S	S
Program input			
Tape code	EIA / ISO	S	S
Optional block skip	9ea	S	S
Program number	O4-digits(1-9999)	S	S
Sequence number	N8-Digits	S	S

ITEM	SPECIFICATION	STD	MC
Program input			
Decimal point programming		S	S
Coordinate system setting	G50	S	S
Coordinate system shift		S	S
Workpiece coordinate system	G52-G59	S	S
Workpiece coordinate system preset	G92.1	S	S
Direct drawing dimension programming		S	S
G code system	A	S	S
Programmable data input	G10	S	S
Sub program call	10Folds Nested	S	S
Custom macro B		S	S
Addition of custom macro -common variables	#100-#199, #500-#999	S	S
Canned cycles		S	S
Multiple repetitive cycle		S	S
Multiple repetitive cycle II		S	S
Canned cycles for drilling		S	S
Manual Guide i		S	S
Spindle speed function			
Constant surface speed control	G96 / G97	S	S
Spindle override	0-150%	S	S
Spindle orientation		S	S
Rigid tapping		S	S
Spindle synchronous control		-	-
Editing operation			
Part program storage length	5,120 m (2MB)	S	S
Number of register able programs	Max.1000 ea	S	S
Background editing		S	S
Extended part program editing		S	S
Play back		S	S
Operation/Display			
Clock function		S	S
Self-diagnosis function		S	S
Alarm history display		S	S
Help function		S	S
Run hour and parts count display		S	S
Graphic function		S	S
Multi-language display	English, German, French, Italian, Chinese, Spanish, Korean, Portuguese, Polish, Hungarian, Swedish,Russian	S	S
Data input/output			
Ethernet interface		S	S
Memory card interface		S	S
USB card interface		S	S
Others			
Display Unit	15" Non touch display	S	S
Fanuc i-HMI	15" Touch type display	O	O
HWACHEON Machining Software			
L-HTLD (Hwacheon Tool Load Detect System)		S	S
L-CAL (Lathe Calculator Function)		S	S
L-COUNT (Work / Tool Counter Management)		S	S
HLVC (Hwacheon Lathe Vibration Control)		S	S
M-VISION Pro		O	O

Hwacheon Global Network

 Hwacheon Headquarter  Hwacheon America  Hwacheon Europe  Hwacheon Asia



HWACHEON

Please contact us for product inquiries.

www.hwacheon.com

The product design and specifications may change without prior notice.
Read the operation manual carefully and thoroughly before operating the product,
and always follow the safety instructions and warnings labels attached on the surfaces of the machines.

HEAD OFFICE

HWACHEON MACHINE TOOL CO., LTD.

123-17, HANAMSANDAN 4BEON-RO, GWANGSAN-GU, GWANGJU, KOREA
TEL: +82-62-951-5111 FAX: +82-62-951-0086

SEOUL OFFICE

46, BANGBAE-RO, SEOCHO-GU, SEOUL, KOREA
TEL: +82-2-523-7766 FAX: +82-2-523-2867

USA

HWACHEON MACHINERY AMERICA, INC.

555 BOND STREET, LINCOLNSHIRE, ILLINOIS, 60069, USA
TEL: +1-847-573-0100 FAX: +1-847-573-9900

SINGAPORE

HWACHEON ASIA PACIFIC PTE. LTD.

21 BUKIT BATOK CRESCENT, #08-79 WCEGA TOWER,
658065, SINGAPORE
TEL: +65-6515-4357 FAX: +65-6515-4358

VIETNAM

HWACHEON MACHINE TOOL VIETNAM CO., LTD.

HCM: TRANING CENTER, KCM CAO, Q.9, HCMC, VIET NAM
TEL: +84-28-6275-7011
HN: SO 11, D. HUU NGH, VSIP BAC NINH, VIET NAM
TEL: +84-22-2390-8981

GERMANY

HWACHEON MACHINERY EUROPE GMBH

JOSEF-BAUMANN STR. 25, 44805, BOCHUM, GERMANY
TEL: +49-234-912-816-0 FAX: +49-234-912-816-60

INDIA

HWACHEON MACHINE TOOL INDIA PVT. LTD.

LUNKAD SKY VISTA, UNIT NO.202, 2ND FLOOR PLOT NO.84,
LOHEGAON, VIMAN NAGAR, PUNE 411014, INDIA
TEL: +91-96-73-986633

CHINA

HWACHEON MACHINE TOOL CHINA CO., LTD.

B03A LIANGUAN JUHE INTERNATIONAL HARDWARE CITY, NO.
143 ZHENANZHONG ROAD, JINXIA, CHANGAN TOWN,
DONGGUAN CITY, GUANDONG PROVINCE, CHINA #523852
TEL: +86-769-8932-0601 FAX: +86-769-8932-0602